

**WORKMAN  
NYDEGGER  
& SEELEY**

ATTORNEYS AT LAW

A PROFESSIONAL CORPORATION

1000 EAGLE GATE TOWER

60 EAST SOUTH TEMPLE

SALT LAKE CITY, UTAH 84111

TELEPHONE (801) 533-9800

FACSIMILE (801) 328-1707

RICK D. NYDEGGER  
DAVID O. SEELEY  
BRENT P. LORIMER  
THOMAS R. VUKSINICK  
LARRY R. LAYCOCK  
JONATHAN W. RICHARDS  
DAVID R. WRIGHT  
JOHN C. STRINGHAM  
BRADLEY K. DESANDRO  
JOHN M. GUYNN  
CHARLES L. ROBERTS  
GREGORY M. TAYLOR  
DANA L. TANGREN  
KEVIN B. LAURENCE  
ERIC L. MASCHOFF  
CHARLES J. VEVERKA  
ROBYN L. PHILLIPS  
RICHARD C. GILMORE†  
DAVID B. DELLENBACH

KEVIN K. JOHANSON  
L. DAVID GRIFFIN  
R. BURNS ISRAELSEN  
DAVID R. TODD  
FRASER D. ROY  
CARL T. REED  
JESÚS JUANÓS I TIMONEDA, Ph D  
R. PARRISH FREEMAN, Jr.  
PETER F. MALEN, Jr.  
ADRIAN J. LEE  
KYLE H. FLINDT  
DAVID B. TINGEY  
L. REX SEARS

†ADMITTED ONLY IN CALIFORNIA

H. ROSS WORKMAN  
OF COUNSEL

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box: PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, DC 20231

TRANSMITTAL FOR PATENT APPLICATION

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is a United States patent application entitled COMPOSITING IMAGES FROM MULTIPLE SOURCES in the name of the following inventors: Donald M. Gray, III, and John Allen Tardif.

Enclosed are the following:

- X A specification, claims, abstract, and cover page in total comprising thirty-two (32) pages.
- X Seven (7) sheets of drawings.
- X A joint signature Declaration, Power of Attorney and Petition.
- X An Assignment conveying the invention to WebTV Networks, Inc., including a Form PTO 1595 recordation cover sheet.
- A Declaration Claiming Small Entity Status pursuant to 37 C.F.R. § 1.9 and § 1.27.
- X A Certificate of Mailing by "Express Mail" certifying a filing date by use of Express Mail Label No. EL695574958US.

\_\_\_ Priority to \_\_\_\_\_ (country) Application Serial No. \_\_\_\_\_ filed on \_\_\_\_\_ is claimed under 35 U.S.C. § 119.

\_\_\_ A certified copy of foreign priority application Serial No. \_\_\_\_\_.

\_\_\_ An Associate Power of Attorney.

The filing fee has been calculated as shown below.

			SMALL ENTITY		LARGE ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE	FEE	RATE	FEE
BASIC FEE				\$355		\$710
TOT. CLAIMS	27 - 20=	7	X 9=		X 18=	126
IND. CLAIMS	4 - 3=	1	X 40		X 80=	80
MULTIPLE DEPENDENT CLAIM			+135=		+270=	
			<b>TOTAL</b>		<b>TOTAL</b>	916

X Form PTO-2038 submitting Credit Card Payment in the amount of \$956 is enclosed to cover:

X The \$916.00 government filing fee.

X The \$40.00 recordation fee of the enclosed assignment.

\_\_\_ Please debit Deposit Account No. 23-3178 in the amount of \$\_\_\_\_\_ for the government filing fee.

\_\_\_ Please debit Deposit Account No. 23-3178 in the amount of \$40.00 for recordation of the enclosed Assignment.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 23-3178.

X Any additional filing fees required under 37 C.F.R. § 1.16.

X Any patent application processing fees under 37 C.F.R. § 1.17.

X The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 23-3178.

- X Any filing fees under 37 C.F.R. § 1.16 for presentation of extra claims.
- X Any patent application processing fees under 37 C.F.R. § 1.17.
- The issue fee set forth in 37 C.F.R. § 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. § 1.311(b).
- X A duplicate copy of this letter is enclosed.

Please address all future correspondence in connection with the above-identified patent application to the attention of the following:

RICK D. NYDEGGER  
WORKMAN, NYDEGGER & SEELEY  
1000 Eagle Gate Tower  
60 East South Temple  
Salt Lake City, Utah 84111  
Telephone: (801) 533-9800

Dated this 31<sup>st</sup> day of October 2000.

Respectfully submitted,



CARL T. REED  
Attorney for Applicant  
Registration No. 45,454



**022913**

PATENT TRADEMARK OFFICE  
\*\*\*Customer No.\*\*\*

CTR:dfw

G:\DATA\WPDOCSRN\WEBTV\OTHERDOC\74\_patent\_trx\_1031.doc

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

"Express Mail" Mailing Label No.: EL695574958US

Date of Deposit: October 31, 2000

CERTIFICATE OF MAILING BY "EXPRESS MAIL"



I hereby certify that the following documents are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated below in an envelope addressed to Box: PATENT APPLICATION, Assistant Commissioner for Patents, Washington, DC 20231:

- Patent Application in the names of Donald M. Gray, III and John Allen Tardif for COMPOSITING IMAGES FROM MULTIPLE SOURCES (32 pages)
- Drawings (7 sheets)
- Assignment with Form PTO-1595 cover sheet (2 pages)
- Declaration, Power of Attorney and Petition (2 pages)
- Transmittal Letter (3 pages) (in duplicate)
- Form PTO-2038 submitting Credit Card Payment in the amount of \$956
- Postcard

Dated this 31<sup>st</sup> day of October 2000.

Respectfully submitted,

CARL T. REED  
Attorney for Applicant  
Registration No. 45,454

WORKMAN, NYDEGGER & SEELEY  
1000 Eagle Gate Tower  
60 East South Temple  
Salt Lake City, Utah 84111  
Telephone: (801) 533-9800

CTR:dfw

G:\DATA\WPDOCSRN\WEBTV\OTHERDOC\74\_patent\_trx\_1031.doc

**UNITED STATES PATENT APPLICATION**

of

**Donald M. Gray, III**

and

**John Allen Tardif**

for

**COMPOSITING IMAGES FROM MULTIPLE SOURCES**

**WORKMAN, NYDEGGER & SEELEY**

A PROFESSIONAL CORPORATION

ATTORNEYS AT LAW

1000 EAGLE GATE TOWER

60 EAST SOUTH TEMPLE

SALT LAKE CITY, UTAH 84111

## **BACKGROUND OF THE INVENTION**

### **1. The Field of the Invention**

The present invention relates to systems and methods for compositing an image. More particularly, the present invention relates to systems and methods for compositing an image by minimizing the memory required to composite the image and for improving the color quality of the image.

### **2. The Prior State of the Art**

Televisions, computer monitors, and other display devices are capable of displaying many different kinds of signals, data, and images. Instead of receiving signals over a line of sight antenna, more and more people are receiving digital television signals over cable and satellite systems. These media are also being increasingly used to connect people with the Internet, and many people are beginning to have television and Internet access over the same medium. As a result, the display devices and as well as the set top boxes that receive those signals and data are being required to effectively handle those signals and data in order to display images that may be generated from those signals and data.

Displaying these images can be a difficult task for a variety of reasons. For example, consider how ordinary digital data, such as the data encountered on the Internet, is operated on by a set top box before an image may be generated from the digital data and displayed to the user. Because the Internet data can include a variety of graphic data, video streams, and other data types, it is necessary to identify the sources of data that will be used to generate the image. The generation of an image involves compositing the image from the data of the identified sources.

1 Compositing the Internet data is a lengthy process that often involves multiple data  
2 buffers. If the image to be displayed includes, for example, data from both a video source  
3 and a graphic source, it is often necessary to have buffers for both sampling the video and  
4 graphic data as well as buffers for resizing the video and graphic data. After this data has  
5 been sampled and resized, the data is ready to be composited into an image and displayed  
6 on the display device.

7 The final step of compositing the image often requires a system of full size image  
8 buffers. Typically, a double image buffer is used to display images that are being  
9 composited. While one of the image buffers containing a composited image is being  
10 displayed, the other image buffer is used to composite the next image. After the second  
11 image buffer has been composited, it is displayed while the image buffer that just finished  
12 being displayed is used to composite the next image. This process is repeated for each  
13 image being displayed on the display device.

14 Processing data in this manner requires a significant amount of memory, but newer  
15 technologies such as High Definition Television (HDTV) require even more memory in  
16 order to provide a double image buffer to both composite and display the images. The  
17 images that are included in HDTV have more lines in each image and more pixels in each  
18 line. Also the data that describes each pixel is often more complex. As a result, significant  
19 bandwidth is required to accommodate HDTV data. In fact, it is usually necessary to  
20 compress HDTV signals in order to fit within available bandwidths. As a result, the data  
21 that describes the images of HDTV requires significant resources because of the memory  
22 requirements. This amount of memory can be expensive, especially in consumer devices  
23 that are sensitive to cost.

24

1 Another problem associated with displaying images generated from various types  
2 of data on a display device is that the graphics on a particular image often overlap. In  
3 some instances, only the top image is visible to the user. However, the underlying  
4 graphics are usually composited without regard to whether they would be visible to the  
5 user. Compositing the data included in a graphic that will not be visible to a user is not  
6 only an inefficient use of time, but is also an expensive use of memory, particularly when  
7 there are several portions of the image that may overlap. In the case of HDTV, this can be  
8 a significant problem because a large amount of data is used to define and describe each  
9 portion of the image.

10 Another drawback of image composition is that when an image is composited, the  
11 color or video quality of the image often suffers because not all of the data that is used to  
12 generate the image is in the same color space. Some of the data is in the Red Green Blue  
13 (RGB) color space, and some of the data may be in the YCbCr (referred to herein as YUV)  
14 color space where the Y represents the luma component and the U and V represent the  
15 color difference or chrominance components. The data can also be represented in other  
16 color spaces. As a result, compositing an image for display may require the data to be  
17 converted from one color space to another color space several times. Each time a color  
18 space is converted to another color space, information is lost or distorted, and the lost or  
19 distorted information translates to poorer image quality as well as poorer image color.

20 This problem is particularly evident when a particular portion of an image is  
21 derived from more than one source. In these situations, the sources are typically converted  
22 to a single color space and blended. This often requires a color space conversion matrix  
23 for each separate source. Because each source may be converted, the conversion matrices,  
24 which are significant pieces of logic, are implemented multiple times. After the data



1 sources have been converted to a common color space or format, they are blended together  
2 to produce an appropriate output. The main drawback is that each color space conversion  
3 degrades the ultimate output.  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24

## SUMMARY OF THE INVENTION

Before an image is displayed on a display device, all of the graphic data, video data, and other data is composited. The systems and methods for compositing an image provided by the present invention effectively minimize the memory requirements for displaying an image by reading the data being displayed directly from the data sources. By reading the data directly from the sources, the double buffering requirements can be significantly reduced or eliminated. In effect, reading image data directly from image data sources saves memory bandwidth and memory footprint. For example, a traditional design reads image source data into hardware, outputs a composited frame to memory, and reads the composited frame from memory to the video output hardware. The systems and methods of the present invention eliminate the steps of outputting a composited frame to memory and reading the composited frame from memory to the video output hardware.

The image to be displayed is divided into spans, lines, and slices. Each line typically has one or more spans and each slice has at least one line. The vertically adjacent spans in each line of each slice are from the same source. As each line is rasterized, the sources that correspond to each span within the line are read at the appropriate time. This enables the image to be composited in real time. The amount of data read from each source corresponds to the amount of pixel data needed for the pixels in a particular span.

An advantage of compositing an image in this manner is that portions of the image, such as graphics, that are either translucent or opaque can be handled more efficiently because each span can have more than one source. If the portion of the image being rasterized is translucent, then the various sources are simultaneously read, blended and displayed. If the portion of the image being rasterized is opaque, then only the source that

1 corresponds to the visible portion is read. This enhances efficiency because the sources  
2 that are not visible are not read and do not consume processing time.

3 Another feature of the present invention is the ability to eliminate flicker that may  
4 be associated with some portions of an image by filtering the image data. Flickering may  
5 be caused, for example, by an interlaced screen where a line of a graphic is only displayed  
6 half of the time. When the span that represents the line is encountered, the data from  
7 vertically adjacent spans can be used as sources that are read and blended with the current  
8 span data. Blending the data in this manner eliminates the flicker.

9 The present invention also has the feature of improving the video or color quality  
10 of an image by minimizing the number of times a color space conversion occurs. This is  
11 accomplished by blending all sources having the same color space before blending sources  
12 having different color spaces. Thus, rather than implement logic to convert each separate  
13 source, the sources having the same color space are blended before they are converted to a  
14 different color space. In this manner, it is possible to only perform a single color space  
15 conversion. Because color space conversions result in lower quality or poorer color,  
16 performing a single color space conversion improves the quality of the image that is  
17 ultimately displayed.

18 Additional features and advantages of the invention will be set forth in the  
19 description which follows, and in part will be obvious from the description, or may be  
20 learned by the practice of the invention. The features and advantages of the invention may  
21 be realized and obtained by means of the instruments and combinations particularly  
22 pointed out in the appended claims. These and other features of the present invention will  
23 become more fully apparent from the following description and appended claims, or may  
24 be learned by the practice of the invention as set forth hereinafter.

## BRIEF DESCRIPTION OF THE DRAWINGS

In order that the manner in which the above-recited and other advantages and features of the invention are obtained, a more particular description of the invention briefly described above will be rendered by reference to specific embodiments thereof which are illustrated in the appended drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered to be limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

Figure 1 illustrates an exemplary system that provides a suitable operating environment for the present invention;

Figure 2 is a block diagram illustrating the slices, lines, and spans of an image including active and blank pixel areas;

Figure 3 illustrates the active pixel area of an image including video data, graphic data, translucent image portions and opaque image portions;

Figure 4 illustrates both a line having multiple spans and the sources that are read as those spans are displayed;

Figure 5 illustrates a control structure that is used to store the context information of an image that is being displayed;

Figure 6 illustrates a series of quarter size image buffers that are used for displaying an image on a display device;

Figure 7 is a block diagram of a blending component that receives data streams from multiple sources, blends the sources that are in the same color space, converts the blended streams to a single color space, and produces an output for display; and

A PROFESSIONAL CORPORATION  
ATTORNEYS AT LAW  
1000 EAGLE GATE TOWER  
60 EAST SOUTH TEMPLE  
SALT LAKE CITY, UTAH 84111

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24

Figure 8 is a block diagram that illustrates the data sources for eliminating the flicker that may be associated with a portion of an image.

## DETAILED DESCRIPTION OF THE INVENTION

As used herein, "image" refers to what is shown on a display device and can include both the active pixel areas and the blank pixel areas. An image can be a frame and can include video data, graphic data, Internet data and other types of data that are displayed on a display device. Images are typically displayed one after another on the display device.

For a given display, there are typically many different windows that are being shown. For example, when a user is viewing Internet data, there may be some synthetically generated windows or borders, three dimensional graphics, a video stream and other data displayed in each image. Each image generated for this type of display is composited by the present invention directly from the data sources. Thus, when a portion of video data is needed, that portion of the video data is simply read from the source and displayed.

The present invention extends to both methods and systems for compositing an image. The embodiments of the present invention may comprise a special purpose or general purpose computer including various computer hardware, as discussed in greater detail below.

Embodiments within the scope of the present invention also include computer-readable media for carrying or having computer-executable instructions or data structures stored thereon. Such computer-readable media can be any available media which can be accessed by a general purpose or special purpose computer. By way of example, and not limitation, such computer-readable media can comprise RAM, ROM, EEPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to carry or store desired program code means in the

1 form of computer-executable instructions or data structures and which can be accessed by  
2 a general purpose or special purpose computer. When information is transferred or  
3 provided over a network or another communications connection (either hardwired,  
4 wireless, or a combination of hardwired or wireless) to a computer, the computer properly  
5 views the connection as a computer-readable medium. Thus, any such a connection is  
6 properly termed a computer-readable medium. Combinations of the above should also be  
7 included within the scope of computer-readable media. Computer-executable instructions  
8 comprise, for example, instructions and data which cause a general purpose computer,  
9 special purpose computer, or special purpose processing device to perform a certain  
10 function or group of functions.

11 Figure 1 and the following discussion are intended to provide a brief, general  
12 description of a suitable computing environment in which the invention may be  
13 implemented. Although not required, the invention will be described in the general context  
14 of computer-executable instructions, such as program modules, being executed by  
15 computers in network environments. Generally, program modules include routines,  
16 programs, objects, components, data structures, etc. that perform particular tasks or  
17 implement particular abstract data types. Computer-executable instructions, associated  
18 data structures, and program modules represent examples of the program code means for  
19 executing steps of the methods disclosed herein. The particular sequence of such  
20 executable instructions or associated data structures represent examples of corresponding  
21 acts for implementing the functions described in such steps.

22 Those skilled in the art will appreciate that the invention may be practiced in  
23 network computing environments with many types of computer system configurations,  
24 including set top boxes, personal computers, hand-held devices, multi-processor systems,

1 microprocessor-based or programmable consumer electronics, network PCs,  
2 minicomputers, mainframe computers, and the like. The invention may also be practiced  
3 in distributed computing environments where tasks are performed by local and remote  
4 processing devices that are linked (either by hardwired links, wireless links, or by a  
5 combination of hardwired or wireless links) through a communications network. In a  
6 distributed computing environment, program modules may be located in both local and  
7 remote memory storage devices.

8 With reference to Figure 1, an exemplary system for implementing the invention  
9 includes a general purpose computing device in the form of a conventional computer 20,  
10 including a processing unit 21, a system memory 22, and a system bus 23 that couples  
11 various system components including the system memory 22 to the processing unit 21.  
12 The system bus 23 may be any of several types of bus structures including a memory bus  
13 or memory controller, a peripheral bus, and a local bus using any of a variety of bus  
14 architectures. The system memory includes read only memory (ROM) 24 and random  
15 access memory (RAM) 25. A basic input/output system (BIOS) 26, containing the basic  
16 routines that help transfer information between elements within the computer 20, such as  
17 during start-up, may be stored in ROM 24.

18 The computer 20 may also include a magnetic hard disk drive 27 for reading from  
19 and writing to a magnetic hard disk 39, a magnetic disk drive 28 for reading from or  
20 writing to a removable magnetic disk 29, and an optical disk drive 30 for reading from or  
21 writing to removable optical disk 31 such as a CD-ROM or other optical media. The  
22 magnetic hard disk drive 27, magnetic disk drive 28, and optical disk drive 30 are  
23 connected to the system bus 23 by a hard disk drive interface 32, a magnetic disk drive-  
24 interface 33, and an optical drive interface 34, respectively. The drives and their



1 associated computer-readable media provide nonvolatile storage of computer-executable  
2 instructions, data structures, program modules and other data for the computer 20.  
3 Although the exemplary environment described herein employs a magnetic hard disk 39, a  
4 removable magnetic disk 29 and a removable optical disk 31, other types of computer  
5 readable media for storing data can be used, including magnetic cassettes, flash memory  
6 cards, digital video disks, Bernoulli cartridges, RAMs, ROMs, and the like.

7       Program code means comprising one or more program modules may be stored on  
8 the hard disk 39, magnetic disk 29, optical disk 31, ROM 24 or RAM 25, including an  
9 operating system 35, one or more application programs 36, other program modules 37, and  
10 program data 38. A user may enter commands and information into the computer 20  
11 through keyboard 40, pointing device 42, or other input devices (not shown), such as a  
12 microphone, joy stick, game pad, satellite dish, scanner, or the like. These and other input  
13 devices are often connected to the processing unit 21 through a serial port interface 46  
14 coupled to system bus 23. Alternatively, the input devices may be connected by other  
15 interfaces, such as a parallel port, a game port or a universal serial bus (USB). A monitor  
16 47 or another display device is also connected to system bus 23 via an interface, such as  
17 video adapter 48. In addition to the monitor, personal computers typically include other  
18 peripheral output devices (not shown), such as speakers and printers.

19       The computer 20 may operate in a networked environment using logical  
20 connections to one or more remote computers, such as remote computers 49a and 49b.  
21 Remote computers 49a and 49b may each be another personal computer, a server, a router,  
22 a network PC, a peer device or other common network node, and typically include many or  
23 all of the elements described above relative to the computer 20, although only memory  
24 storage devices 50a and 50b and their associated application programs 36a and 36b have

1 been illustrated in Figure 1. The logical connections depicted in Figure 1 include a local  
2 area network (LAN) 51 and a wide area network (WAN) 52 that are presented here by way  
3 of example and not limitation. Such networking environments are commonplace in office-  
4 wide or enterprise-wide computer networks, intranets and the Internet.

5 When used in a LAN networking environment, the computer 20 is connected to the  
6 local network 51 through a network interface or adapter 53. When used in a WAN  
7 networking environment, the computer 20 may include a modem 54, a wireless link, or  
8 other means for establishing communications over the wide area network 52, such as the  
9 Internet. The modem 54, which may be internal or external, is connected to the system bus  
10 23 via the serial port interface 46. In a networked environment, program modules depicted  
11 relative to the computer 20, or portions thereof, may be stored in the remote memory  
12 storage device. It will be appreciated that the network connections shown are exemplary  
13 and other means of establishing communications over wide area network 52 may be used.

14 Figure 2 is a block diagram that generically illustrates an image 200. The image  
15 200 includes an active pixel area 204 and a blank pixel area 202. Typically, the active  
16 pixel area 204 is contained within the blank pixel area 202. The active pixel area 204 is  
17 used to display video, graphics, text, colors and the like. The image 200 can be either a  
18 frame or a field for display. Usually, images are displayed one after another. The width of  
19 the image 200 is described by the Xscreen 212 and the height of the image 200 is described  
20 by the Yscreen 214. The width of the active pixel area 204 is described by the Hsize 216  
21 and the height of the active pixel area 204 is described by the Vsize 218.

22 The image 200 includes multiple lines represented by line 208. The line 208 may  
23 be, for example, scan line of a frame buffer and may be described as a group of contiguous  
24 pixels that have the same vertical axis value in the display area. The line 208 includes

1 pixels in both the active pixel area 204 as well as the blank pixel area 202, although a line  
2 may also refer only to the spans in the active pixel area 204. Each line may be divided into  
3 one or more spans, illustrated as spans 206 and 207. The spans 207 are in the blank pixel  
4 area 202 while the spans 206 are located in the active pixel area 204. Each span 206 or  
5 207 is a contiguous section of a line and each span 206 or 207 is generated from the same  
6 source or sources. Thus, each individual span of a line will be generated from the same  
7 streams and control information. A stream includes a data stream received from a source  
8 such as Direct Memory Access (DMA), and may be described as the information that  
9 corresponds to or generates contiguous pixels.

10 A slice, which is illustrated as slice 210, is a set of contiguous lines that each have  
11 spans that are related. The vertically related or vertically adjacent spans within a slice are  
12 from the same source or sources and have the same width. The slice 210 includes the lines  
13 having the spans 220 and 219, while the slice 211 includes the lines having the spans 221,  
14 222, and 223. In this manner, the image 200 may be defined in terms of streams, spans,  
15 lines, and slices.

16 Figure 3 is a block diagram that more specifically identifies the spans, lines and  
17 slices of a particular image. The image 250 is displayed on a display device 249, which  
18 may be a television screen, a computer monitor or other device. The image 250 includes a  
19 video 257 and a graphic 258, illustrates the concept of translucent image portions using the  
20 graphics 263 and 264, and shows the concept of opaque image portions using graphics 266  
21 and 267.

22 As shown in the image 250, which does not include blank pixel area in this  
23 example, the video 257 is vertically longer than the graphic 258. Thus, the line 268  
24 includes spans of both the video 257 and the graphic 258 while the line 269 does not

1 include any spans of the graphic 258. Because the lines do not have similar spans, they  
2 cannot be included in the same slice. The line 268 has spans 252, 253, 254, 255, and 256,  
3 and all the lines in the slice 251 have these same spans. Because the line 269 does not  
4 have the same spans as the line 268, it is in the slice 259 rather than the slice 251, and lines  
5 in the slice 259 have the spans 260, 261, and 262.

6 The image portion 265, which is where the graphic 263 overlaps with the graphic  
7 264 is translucent because the graphics are blended together on the display 249. The  
8 overlap between the graphic 266 and the graphic 267, however, is opaque because only one  
9 of the graphics is displayed while the other graphic is obscured by the other graphic. This  
10 is important when an image is analyzed to determine which sources should be used as the  
11 graphics are displayed. In accordance with the present invention, obscured graphics can be  
12 effectively ignored as the image 249 is generated.

13 Figure 4 is a block diagram illustrating the generation of an image in the context of  
14 a line. Figure 4 illustrates a line 400 having spans 405, 406, and 407. Figure 4 also  
15 illustrates source 401, 402, 403, and 404. The data to generate the span 405 is read from  
16 the source 401. The data to formulate the span 406 is read from the source 401, the source  
17 403 and the source 404. The data to create the span 407 is read from the source 401, 402,  
18 403, and 404. Because some of the spans are generated from multiple sources, it is often  
19 necessary to blend the sources before they are actually displayed. A preferred system and  
20 method for blending the sources is described in reference to Figure 7.

21 Generally, each span of a line can be generated from one or more sources and the  
22 data for the span 405 is read before the data for the span 406. Similarly, the data for the  
23 span 406 is read before the data for the span 407. Thus, the sources that provide data for  
24 the spans are read as the span is rasterized in one embodiment of the present invention.

1 More simply, the present invention composites the image directly from the sources rather  
2 than using double image buffers where one image buffer is used for compositing the video  
3 while the other image buffer is used to display an image that was previously composited.

4 The rasterization of the span 405 includes reading the appropriate amount of data  
5 from the source 401. Generating the span 406 includes reading the appropriate data from  
6 the sources 401, 403 and 404. If the span 406 corresponds to a translucent image or  
7 graphic, then the sources for the span 406 are blended. If the span 406 corresponds to an  
8 opaque image or graphic and the data from the source 401 is to be visible, then the sources  
9 403 and 404 are not read in this embodiment.

10 Because data is read directly from the data sources, it is necessary to maintain a  
11 current location within each source. After a span has been rasterized, the location is  
12 updated such that the next time a span is generated from this source, the read begins at the  
13 updated location. For example, if video is being displayed as part of an image, then the  
14 video portion of the image corresponds to vertically related spans. Each span is read once  
15 per line. It is necessary to ensure that the proper video data is read by maintaining where  
16 the data for the next span begins. The data that is read for each span corresponds to the  
17 pixel data that is needed to generate the pixels located in the span.

18 Figure 5 is a block diagram of a control structure 500 that contains image context  
19 information. Usually, the image context information is parsed as Direct Memory Access  
20 (DMA) commands and data control streams. The control structure 500 includes headers  
21 that correspond to the spans, lines, and slices of an image as previously discussed. The  
22 control structure 500 includes an image header 504 that effectively defines an image. The  
23 next header in the control structure 500 is a slice header 505. The number of slice headers  
24 505 in the control structure 500 is dependent on the number of slices in an image.

1           Within each slice header 505 is at least one span header 506 and within each span  
2 header 506 is at least one stream packet 507. Thus, there are N stream headers per span, M  
3 span headers per slice, and X slice headers per image. In memory, only one line is  
4 described per slice, but the DMA is configured to repeatedly load the same context  
5 information for each line in the slice. An offset is maintained to keep track of where the  
6 source last provided data. This is needed because as the next line of an image is displayed  
7 or rasterized, the appropriate data from the source should be accessed and the offset helps  
8 ensure that the source is providing the proper data. The context information stored in the  
9 control structure 500 also contains blending instructions.

10           The headers described in Figure 5 typically identify the sources, the offset into the  
11 sources, blending instructions including multipliers, and the like. Even though the control  
12 structure 500 can be used to display images continuously, it is also able to utilize image  
13 buffers. Also, the control structure 500 is able to support both progressive displays and  
14 interlaced displays.

15           Figure 6 is a block diagram depicting an image that is being composited using less  
16 than full size buffers. In this example, the source of the image is a Moving Pictures  
17 Experts Group (MPEG) source. The image composited on the display is not composited  
18 using full size image buffers, rather the image is read from the source. The buffers shown  
19 in Figure 6 are for decoding and resizing the source data. However, it is possible to also  
20 include less than full size buffers if needed. MPEG decoding occurs at step 601, resizing  
21 occurs at step 602 and compositing occurs at step 603. Each step is working on a different  
22 portion of the image in a progressive fashion.

23           Figure 6 illustrates the MPEG decode output buffer 606 and the resize output buffer  
24 605 of a source 608 and the MPEG decode output buffer 610 and the resize output buffer

1 611 of a source 609. Figure 6 also shows a portion of an image 604 being displayed on the  
2 display 600. Instead of using full size buffers to accomplish the decoding and the resizing  
3 functions on the sources 608 and 609, quarter size buffers are used in this example.  
4 However, this approach to dividing the buffers can extend to various sizes.

5 In this example, the output image 603 is divided into four image portions. While  
6 the first image portion is being displayed on the display 600, the second image portion is  
7 being resized in the resizing output buffers 605 and 611. It is important to understand that  
8 the image 603 is composited directly from the resizing buffers and that the image 604 is  
9 not first composited into a separate image buffer, although a less than full size image  
10 buffer may be utilized. While the second image portion is being resized, a third image  
11 portion is being decoded by an MPEG unit into the MPEG decode output buffers 606 and  
12 610.

13 After the third image portion has been decoded, it is resized and then composited.  
14 In this manner, the image can be displayed while lowering the amount of memory that is  
15 required to buffer the various operations that are performed on the source data. Each  
16 quarter size buffer is working on a next portion of the image and in this manner, the image  
17 is continuously displayed. Because the data is read from the resizing buffer and displayed  
18 as previously noted, a full double image buffer is not required in this instance. In this  
19 example, the buffering requirements are reduced by 75%.

20 Figure 7 illustrates an exemplary blending module for blending data streams from  
21 sources having different color spaces. An important feature of the blending module 700 is  
22 that the number of color space conversions is minimized. The blending module 700 is  
23 configured to receive up to four separate data streams in this example. It is understood that  
24

1 the blending module 700 can be configured to accept fewer or more data streams for  
2 blending.

3 In block 701, the data streams are received at the blending module 700. Each of the  
4 data streams is usually formatted to a particular color space, such as RGB or YUV. In the  
5 case of RGB and YUV stream data, each component in each color space uses 8 bits  
6 representing values from 0 to 255 and the component values that are received in these data  
7 streams are encoded representations of actual component values. Actual component values  
8 are often signed values and have a limited range. When the actual component values are  
9 encoded, an offset is usually applied. For example, in the YUV color space, Y (luma) is an  
10 unsigned value and the valid range of Y is 0 to 219. An offset of 16 may be applied when  
11 encoding the Y component such that the encoded range of Y is 16 to 235. Similarly, U and  
12 V components are signed values with a range of -112 to 112. An offset of 128 is applied  
13 when encoding the U and V components such that the encoded range of the U and V  
14 components is 16 to 240. In block 701, the offset applied during the encoding process is  
15 removed from the data streams to ensure that each data stream is centered around zero for  
16 signed component values or starts at zero for unsigned component values. The offset is  
17 needed in order to correctly blend data streams from different color spaces. More  
18 generally, the offset allows multipliers and alpha values to be consistently applied.

19 In block 702 a data stream constant may be substituted for any of the data streams.  
20 The data stream constant useful for supplying a constant color without the need for the  
21 constant source image to be stored and read from memory. Examples of a data stream  
22 constant include when a blue screen is displayed when a computer system is booting,  
23 blending to a constant color, or fading to a black transition.  
24



1 In block 703, each of the data streams is pre-scaled before the data streams are  
2 blended. The scaling factor (shown as alphaMixed#) can be a constant value per data  
3 stream, an alpha value from one of the input data streams, a color key alpha value from one  
4 of the data streams, or any combination thereof and the like. A constant alpha may be  
5 used, for example, to select a certain percentage of each data stream. This is particularly  
6 useful when cross fading images from more than one source, when applying a vertical  
7 filter using multiple data streams for successive lines of the input image, and the like. An  
8 alpha value taken from one of the data streams is useful when blending an overlay on top  
9 of a background image. Also, block 703 allows the data streams to be inverted if  
10 necessary, which is especially useful when one image source is being subtracted from  
11 another image source.

12 In this example, block 704 contains two blending units: Blend Unit A and Blend  
13 Unit B. Each blending unit in this example simply adds together all of the pre-scaled  
14 inputs that are provided to the blending unit. In this example, Blend Unit A is intended for  
15 the data streams which are in a different color space than the display device. Blend Unit B  
16 is intended for the data streams which are in the same color space as the display device or  
17 are in color spaces that can be related via a multiplier per component, such as the YIQ  
18 color space and the YUV color space. Because each data stream is an input to each  
19 blending unit, those data stream inputs that are in a color space that is not intended for the  
20 relevant blending unit are zeroed such that they do not affect the blend. In this manner,  
21 each blending unit in block 704 blends data streams that are from the same color space. If  
22 additional simultaneous color spaces are desired, more blending units can be added.

23 Because the blending units are each blending data streams from a single color space  
24 and because a display device typically configured for one of those color spaces, there is

1 only a need for a single color space converter. Block 705 is a color space converter that  
2 converts, for example RGB data to YUV data or YUV data to RGB data. It is also  
3 possible to wrap in hue, saturation, and contrast adjustments into the color space converter.  
4 The block 706 is a pixel multiplier that can individually adjust the scale of the components  
5 of the color space. This is useful for the scaling that is required to convert the YIQ color  
6 space to the YUV color space. Block 707 is blending unit that blends the outputs of the  
7 blending units included in block 704. In one example, the block 707 is an adder that  
8 simply adds the resultant data streams, which are now in the same color space, into a single  
9 blended data stream output.

10 In block 708, the resulting data stream is clamped to a color space and the offset is  
11 applied such that the data stream of encoded components is again in valid ranges. In block  
12 709, the data stream is filtered and output. In this manner, the blending module 700 is able  
13 to effectively blend data streams that are from different color spaces while minimizing the  
14 data loss that occurs when a data stream is converted to other color spaces. More  
15 specifically, the data loss that occurs when a data stream is converted to a different color  
16 space is minimized because the number of color space conversions is preferably limited to  
17 a single conversion.

18 Figure 8 is a block diagram that illustrates a portion of an image that is subject to  
19 flickering. In this example, the display device is an interlaced device but other device  
20 types may be used. The image 800 includes, in this example, an image portion 806 that is  
21 subject to flickering. More specifically, the span 802 is on the line 805 and in an interlaced  
22 or similar display, the span 802 is shown only half of the time and is therefore subject to  
23 flickering.  
24

1 The span 802 is typically an edge, for example, of a graphic 801 or other data that  
2 is being displayed. The span 802 usually has vertically adjacent spans 803 and 804. By  
3 blending the spans 803 and 804 with the span 802 when the span 802 is sent to the display,  
4 the flicker of the image portion is eliminated or reduced. Thus, the image data that  
5 corresponds to the spans 803 and 804 are used as additional sources for the generation of  
6 the span 802 as previously described. The spans 802, 803, and 804 are blended as  
7 described previously. Because the spans 802, 803, and 804 are from the same source, it is  
8 possible to blend them using a ratio. Alternatively, the span 802 may be generated or  
9 displayed on a display device using only the span 802 and span 803 as sources.

10 The present invention may be embodied in other specific forms without departing  
11 from its spirit or essential characteristics. The described embodiments are to be considered  
12 in all respects only as illustrative and not restrictive. The scope of the invention is,  
13 therefore, indicated by the appended claims rather than by the foregoing description. All  
14 changes which come within the meaning and range of equivalency of the claims are to be  
15 embraced within their scope.

16 What is claimed and desired to be secured by United States Letters Patent is:  
17  
18  
19  
20  
21  
22  
23  
24

1           1.     In a system including a display device for displaying an image, the image  
2 having one or more sources, a method for compositing the image, the method comprising  
3 the acts of:

4                     dividing the image into one or more slices, each slice including at least one  
5 line;

6                     dividing each line in each slice into at least one span, wherein each span has  
7 at least one associated source included in the one or more sources and each line in  
8 each slice has the same associated sources;

9                     for each span in each line, reading data from the associated source without  
10 using an image buffer; and

11                    displaying the data on the display device.

12  
13           2.     A method as defined in claim 1, wherein the act of reading data from the  
14 associated source further comprises the step of loading each associated source in memory.

15  
16           3.     A method as defined in claim 1, further comprising the act of creating a  
17 control structure having context information for the image.

18  
19           4.     A method as defined in claim 3, wherein the control structure comprises:  
20 an image header;  
21 one or more slice headers associated with the image header;  
22 one or more span headers associated with each slice header; and  
23 one or more stream headers associated with each span header.  
24

1           5.       A method as defined in claim 3, wherein the act of reading data further  
2 comprises the act of reading contiguous pixel data for each span from each associated  
3 source.

4  
5           6.       A method as defined in claim 1, wherein the step of reading data further  
6 comprises the act of blending the one or more sources.

7  
8           7.       A method as defined in claim 6, wherein the act of blending the one or more  
9 sources further comprises the acts of:

10                   blending, in a first blend unit, each of the one or more sources having a first  
11 color space;

12                   blending, in a second blend unit, each of the one or more sources having a  
13 second color space;

14                   converting an output of the first blend unit to the second color space; and

15                   blending the converted output of the first blend unit with a second output of  
16 the second blend unit to produce a blended output.

17  
18           8.       A method as defined in claim 1, further comprising the act of refraining  
19 from reading some of the one or more sources if data from another one of the sources is  
20 visible and opaque.

21  
22           9.       A method as defined in claim 1, wherein the act of reading data further  
23 comprises the act of filtering a span using vertically adjacent spans.

24

1           10.     In a system including a display device for displaying an image, each image  
2 being generated from one or more sources, each source having data, a method for  
3 compositing the image, the method comprising the acts of:

4                     generating a control structure having context information describing the  
5 image, wherein the context information identifies the one or more sources;

6                     reading the data of the one or more sources according to the context  
7 information without storing the data in an image buffer; and

8                     displaying the read data on the display device as the data is read from the  
9 one or more sources.

10  
11           11.     A method as defined in claim 10, wherein the act of generating the control  
12 structure further comprises the act of dividing the image into one or more slices, each slice  
13 having one or more lines and each line having one or more spans, wherein at least one of  
14 the one or more sources is associated with each span and wherein each at least one source  
15 provides a data stream for the associated span.

16  
17           12.     A method as defined in claim 11, wherein the control structure comprises:

18                     one or more slice headers defining the one or more slices;

19                     for each slice header, one or more span headers defining the one or more  
20 spans; and

21                     for each span header, one or more steam headers defining one or more data  
22 streams.

1           13.     A method as defined in claim 10, further comprising the act of loading the  
2 one or more sources in memory of the system.

3  
4           14.     A method as defined in claim 10, wherein the act of reading the data further  
5 comprises the act of blending the data, wherein the data is obtained from one or more data  
6 streams.

7  
8           15.     A method as defined in claim 14, wherein the act of blending the data  
9 further comprises the acts of:

10                   blending all of the one or more data streams having a first color space into a  
11 first output;

12                   blending all of the one or more data streams having a second color space  
13 into a second output;

14                   converting the first output to the second color space; and

15                   blending the first output with the second output.

16  
17           16.     A method as defined in claim 10, wherein the act of reading the data further  
18 comprises the act of filtering a span using vertically adjacent spans, wherein the data of the  
19 vertically adjacent spans are sources.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24

17. In a system including a display device for displaying an image, a method for reducing the flicker of a portion of the image, the method comprising the acts of:

reading data from a source, wherein the data is the portion of the image that is subject to flickering, and wherein the data defines a span included in a line;

reading previous data from the source, wherein the previous data corresponds to a previous span in a previous line, wherein the previous span is vertically adjacent to the span;

reading next data from the source, wherein the next data corresponds to a next span in a next line and wherein the next span is vertically adjacent to the span; and

blending the previous data, the data, and the next data such that the flicker that would otherwise exist at the portion of the image is reduced.

18. A method as defined in claim 17, wherein the data comprises a first data stream, the previous data comprises a second data stream, and the next data comprises a third data stream.

19. A method as defined in claim 18, the act of blending further comprises the acts of:

receiving the first data stream, second data stream, and third data stream at a blending module;

blending the first data stream, second data stream, and third data stream at a blending unit to produce an output data stream;



1 if the output data stream is in a color space that is different from the display  
2 device color space, converting the output data stream to the display device color  
3 space; and

4 displaying the output data stream on the display device.

5  
6 20. A method as defined in claim 17, wherein the display device displays  
7 images using interlaced fields, the method further comprising the act of displaying the  
8 image including the span included in the line, on the display device.  
9

1           21.     In a system that composites images from one or more sources for display on  
2 a display device, a method for blending data streams from the one or more sources, the  
3 method comprising the acts of:

4                     receiving the data streams at a blending unit, wherein each of the data  
5 streams has a color space;

6                     directing the data streams having the same color space one or more  
7 blending units, wherein each blending unit has an associated color space;

8                     blending, by each blending unit, the data streams having the color space that  
9 is the same as the associated color space of the blending unit to produce outputs;

10                    converting the outputs to a single color space; and

11                    blending the outputs to produce an image data stream.

12  
13           22.     A method a defined in claim 21, wherein the single color space is one of  
14 RGB and YUV.

15  
16           23.     A method as defined in claim 21, further comprising the act of reading the  
17 image data to the display device.

18  
19           24.     A method as defined in claim 21, wherein the act of receiving the data  
20 streams further comprises the act of offsetting the data streams.

21  
22           25.     A method as defined in claim 24 wherein the act of offsetting the data  
23 streams further comprises the act of centering the data streams around zero.  
24

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24

26. A method as defined in claim 21, wherein the act of blending, by each blending unit, further comprises the act of zeroing the data streams at the one or more blending units whose color space is not the same as the associated color space of the one or more blending unit.

27. A method as defined in claim 21, wherein the act of directing the data streams further comprises the act of multiplying the data streams by an alpha factor.

ABSTRACT OF THE DISCLOSURE

Systems and methods for compositing an image directly from multiple source image data for reducing system memory footprint and bandwidth and for improving color quality of the image. The image is divided into spans, lines, and slices. Each line includes at least one span and each slice includes at least one line. All lines in a slice have spans associated with identical sources. An image is composited by reading the image data directly from one or more sources of each span. If necessary, the sources are blended. A control structure is used to provide the image context and identifies the sources of the spans. The control structure includes headers for each data stream from each source of each span. Also, the color quality of the image is improved by reducing the number of color space conversions that occur as the image is composited. All sources in the same color space are blended before being blended with sources from other color spaces. Preferably, no more than a single color conversion is required.

G:\DATA\PAT\WORDPAT\14531.74.doc

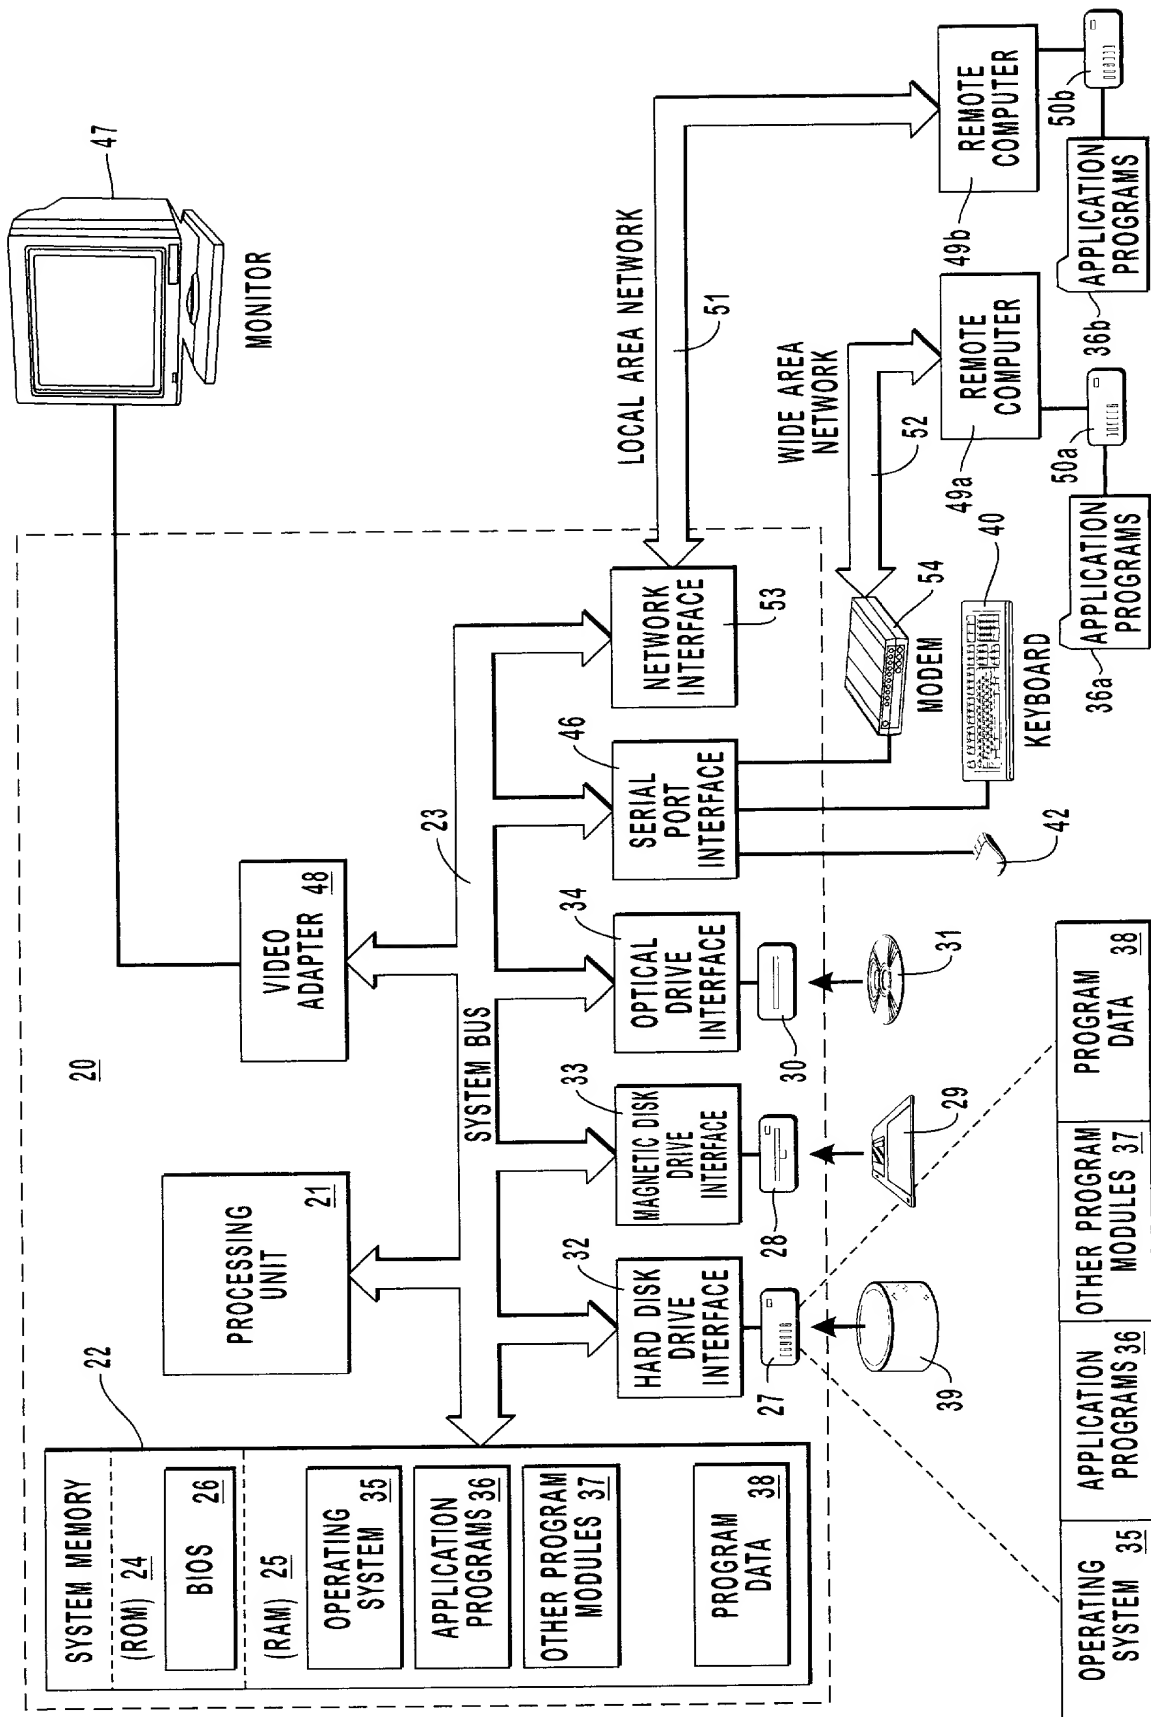


FIG. 1

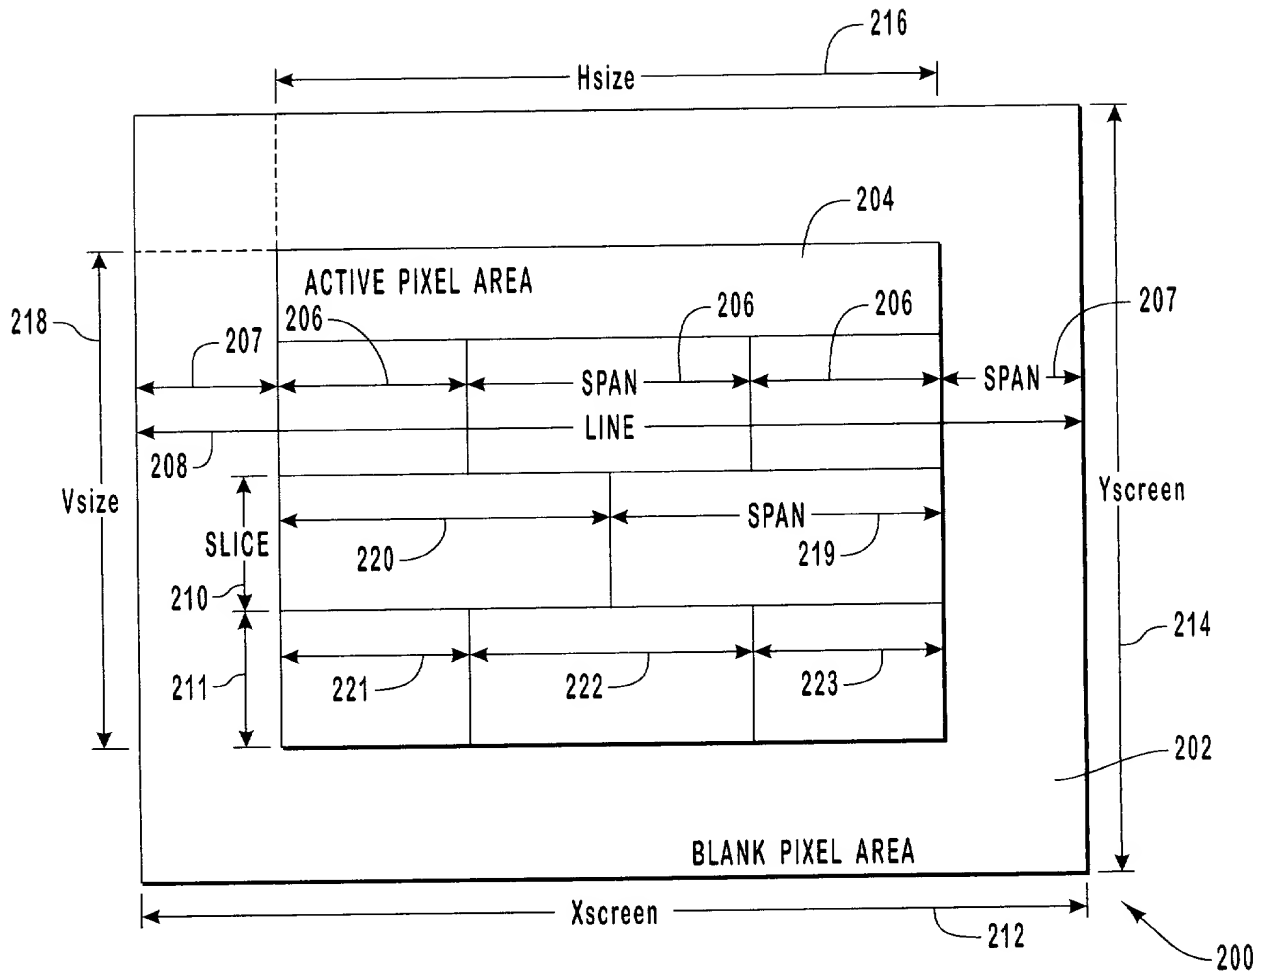


FIG. 2

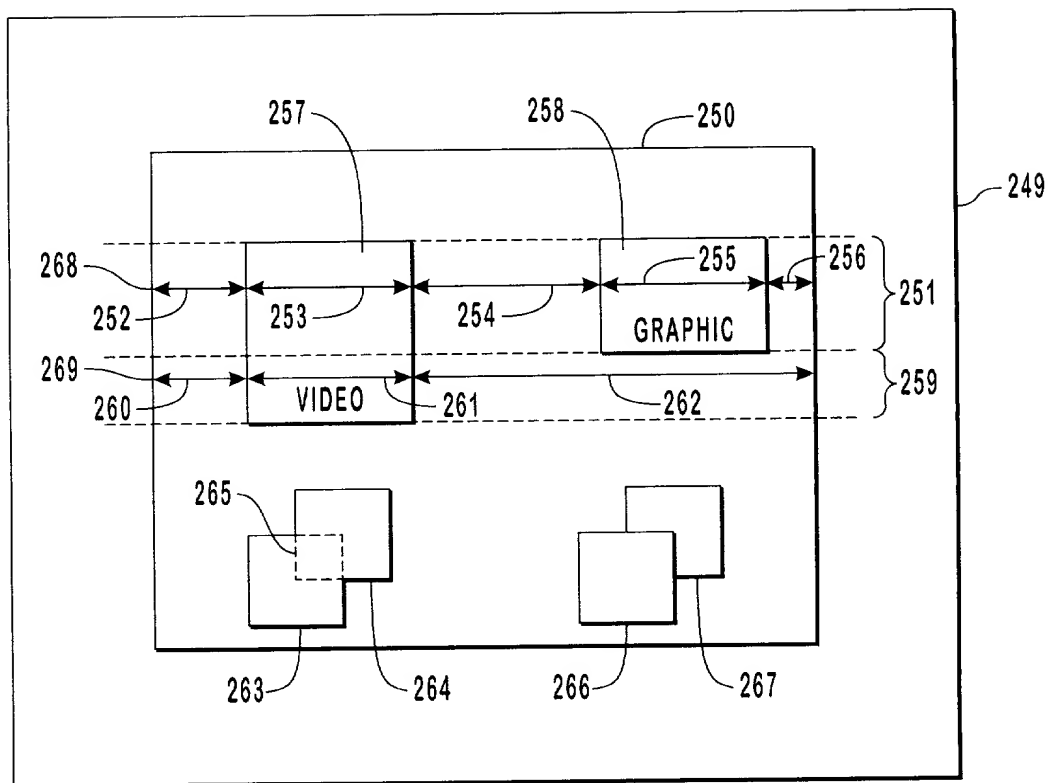


FIG. 3

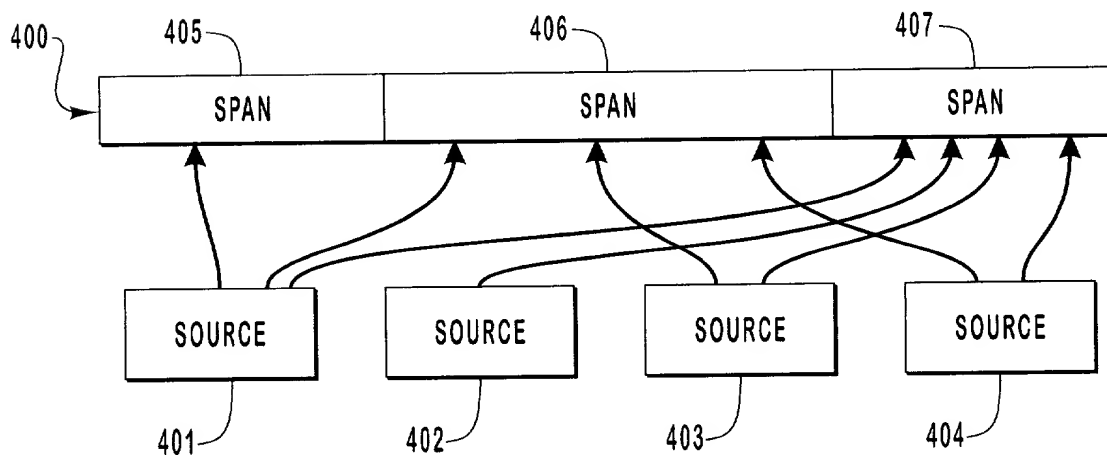


FIG. 4

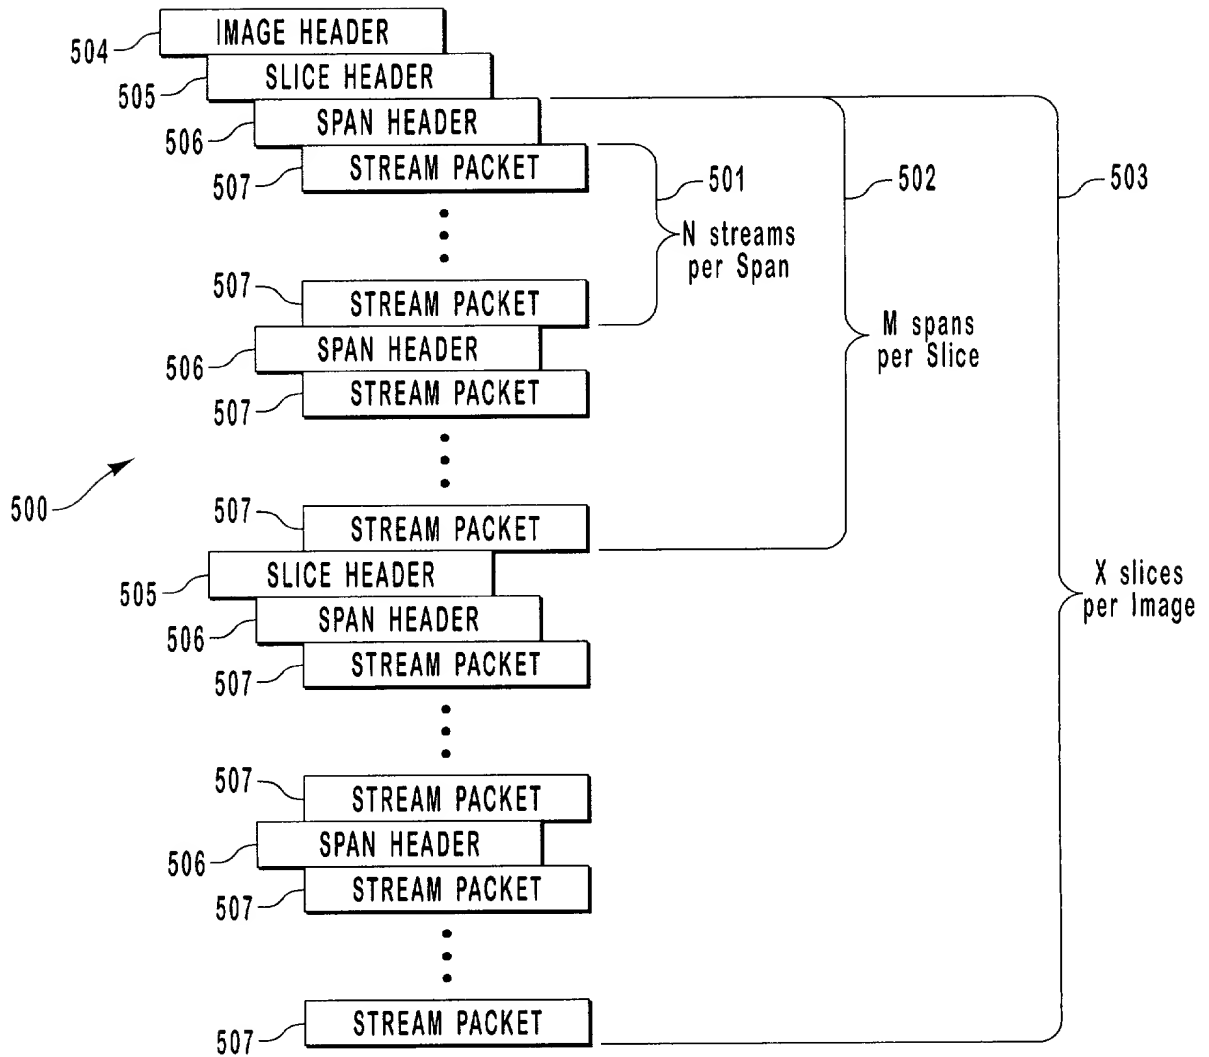


FIG. 5



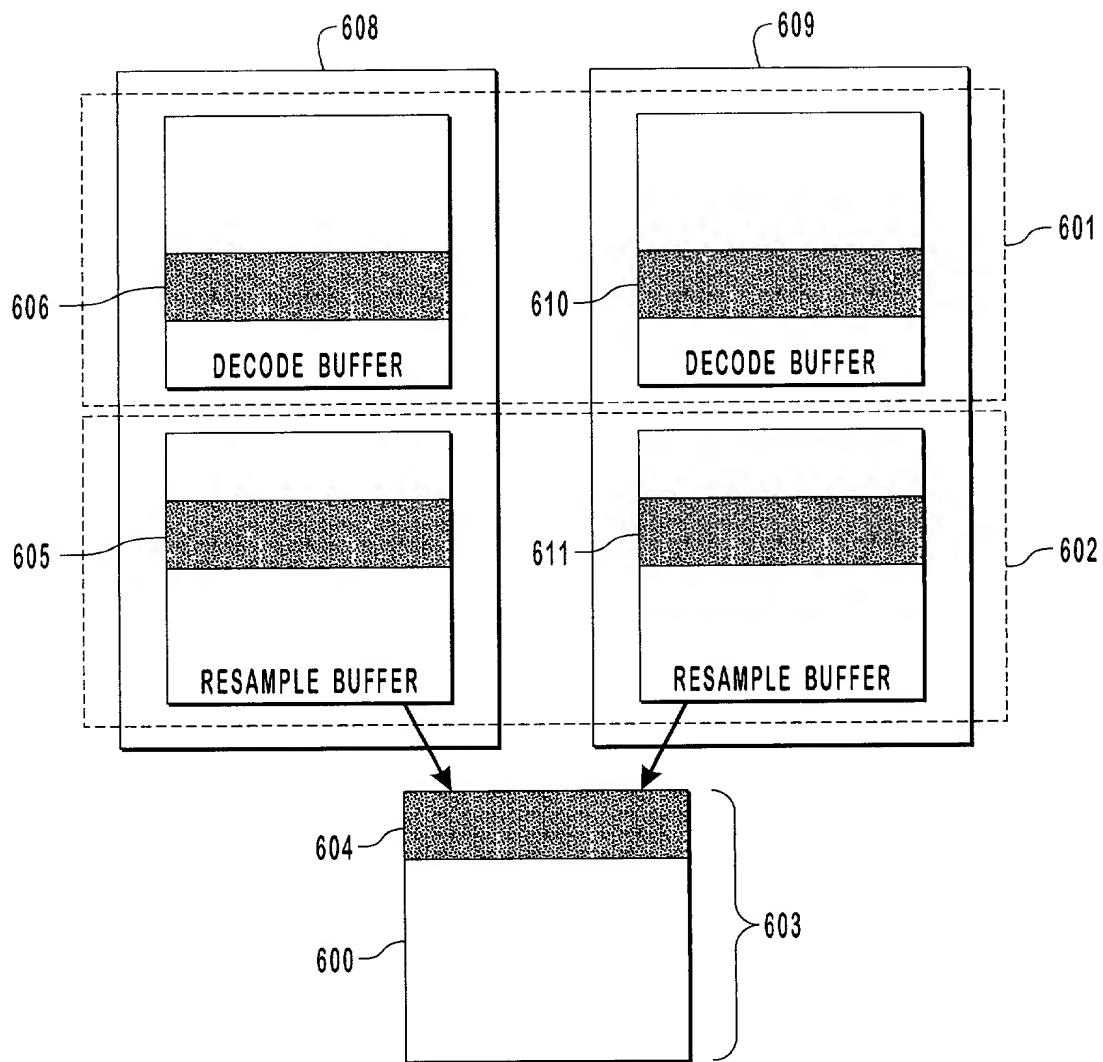


FIG. 6

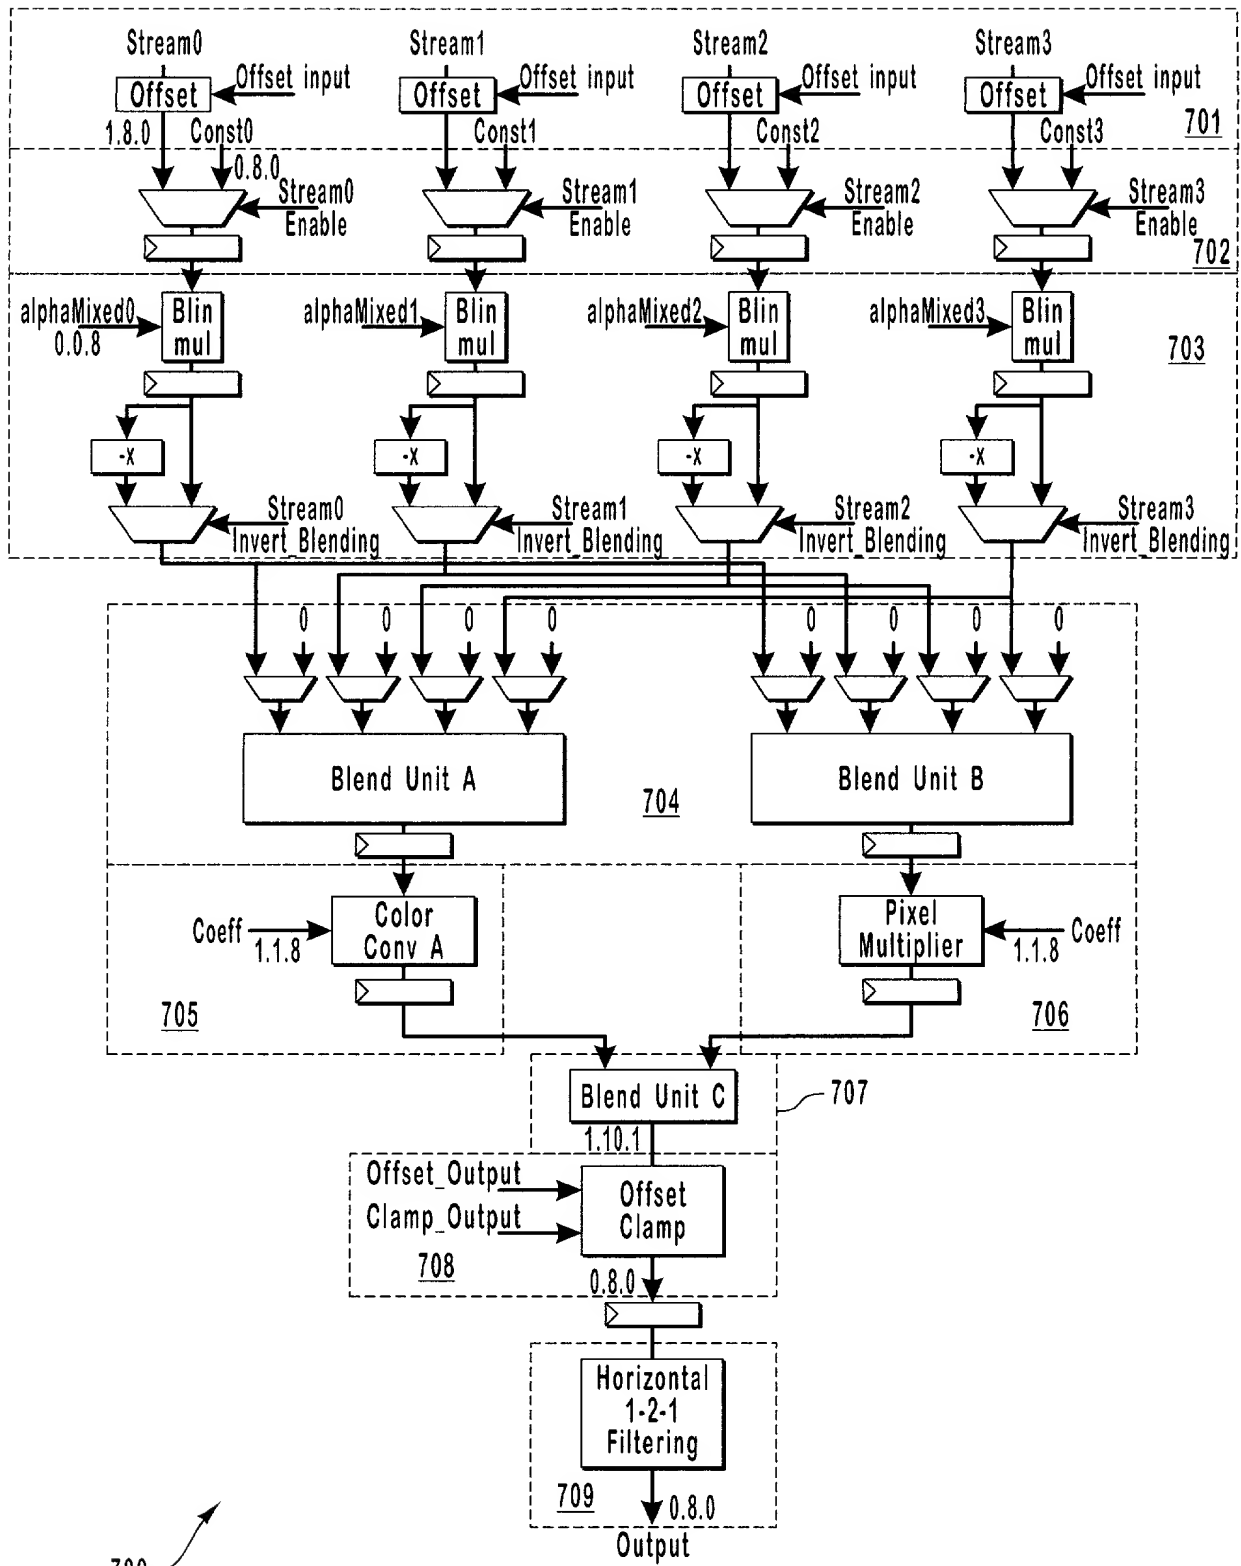


FIG. 7

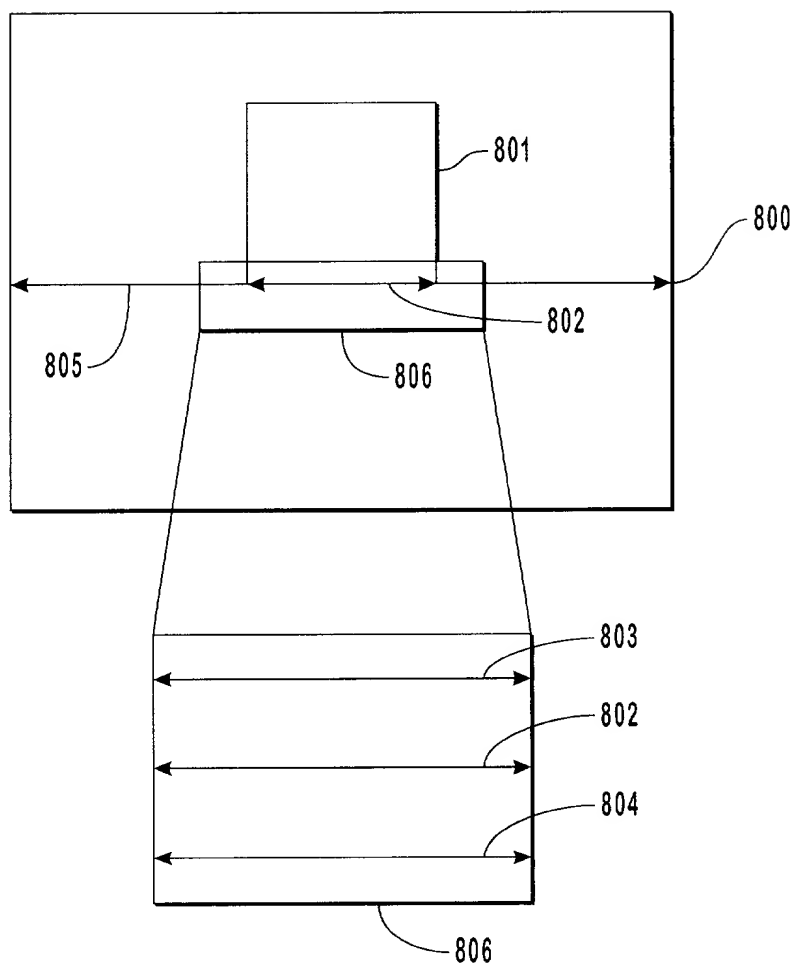


FIG. 8

DECLARATION, POWER OF ATTORNEY, AND PETITION

We,

- (1) Name: Donald M. Gray, III  
Address: 926 Sanchez Street  
San Francisco, CA 94114  
Citizenship: United States of America
- (2) Name: John Allen Tardif  
Address: 1507 Pam Lane  
San Jose, California 95120  
Citizenship: United States of America

declare: that our citizenship, residence addresses, and post office addresses are as set forth above; that we verily believe we are the original, first, and joint inventors of the subject matter of the invention or discovery entitled "COMPOSITING IMAGES FROM MULTIPLE SOURCES," for which a patent is sought and which is described and claimed in the specification attached hereto; and that we acknowledge the duty to disclose information which is material to the examination of this application in accordance with Section 1.56(a) of Title 37 of the Code of Federal Regulations.

We declare further that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful, false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful, false statements may jeopardize the validity of the application or any patent issuing thereon.

We hereby appoint as our attorneys and/or patent agents all listed under Customer No. 022913; and DANIEL D. CROUSE, Registration No. 32,022; and KATIE SAKO, Registration


No. 32,628, of MICROSOFT CORPORATION, One Microsoft Way, Redmond, Washington 98052, with full power to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. All correspondence and telephonic communications should be directed to:

RICK D. NYDEGGER  
WORKMAN, NYDEGGER & SEELEY  
1000 Eagle Gate Tower  
60 East South Temple  
Salt Lake City, Utah 84111

Wherefore, we pray that Letters Patent be granted to us for the invention or discovery described and claimed in the foregoing specification and claims, declaration, power of attorney, and this petition.


Signed at Mountain View, California, this 27 day of October, 2000.

Inventor: \_\_\_\_\_

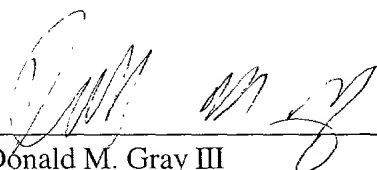  
Donald M. Gray III  
926 Sanchez Street  
San Francisco, California 94114

Signed at Mountain View, California, this 27<sup>th</sup> day of October, 2000.

Inventor: \_\_\_\_\_

  
John Allen Tardif  
1507 Pam Lane  
San Jose, California 95120